

Enhance the Scope of Your IP Voice Communications



KX-UT670



KX-UT248



KX-UT136



KX-UT133



KX-UT123 / KX-UT113

A New Range of SIP Phones Has Arrived

The evolved KX-UT series SIP phone provides you with clear and comfortable communication.

Audio quality is important with telephones because your intentions must be conveyed using only sound. The KX-UT series of SIP phones were born to meet such needs.

By enabling high audio quality and smooth communication, you can have conversations with distant people as if they were right in front of you.

The KX-UT series provides useful communication with customers in various business scenes such as offices, call centres, small or home offices, and front desks.



Features of the KX-UT Series

Improved communication quality

Wide band voice, which supports the G.722, G.711, and G.729a audio codecs, enables you to hear each other's voice clearly for smooth communication.

Combining with a wide range of devices

Supports IP-PBXs, Asterisk, and Broadsoft. Can be used in combination with a wide range of devices to meet customer needs.




User friendly to the last detail

Designed to prioritize user friendliness, with easy-to-press buttons based on ergonomics and a display that focuses on visibility, etc.

Low power consumption

Even in standby mode or in regular usage, the KX-UT series consume less power. By enabling the ECO mode, you can further reduce power consumption.

KX-UT Series Lineup

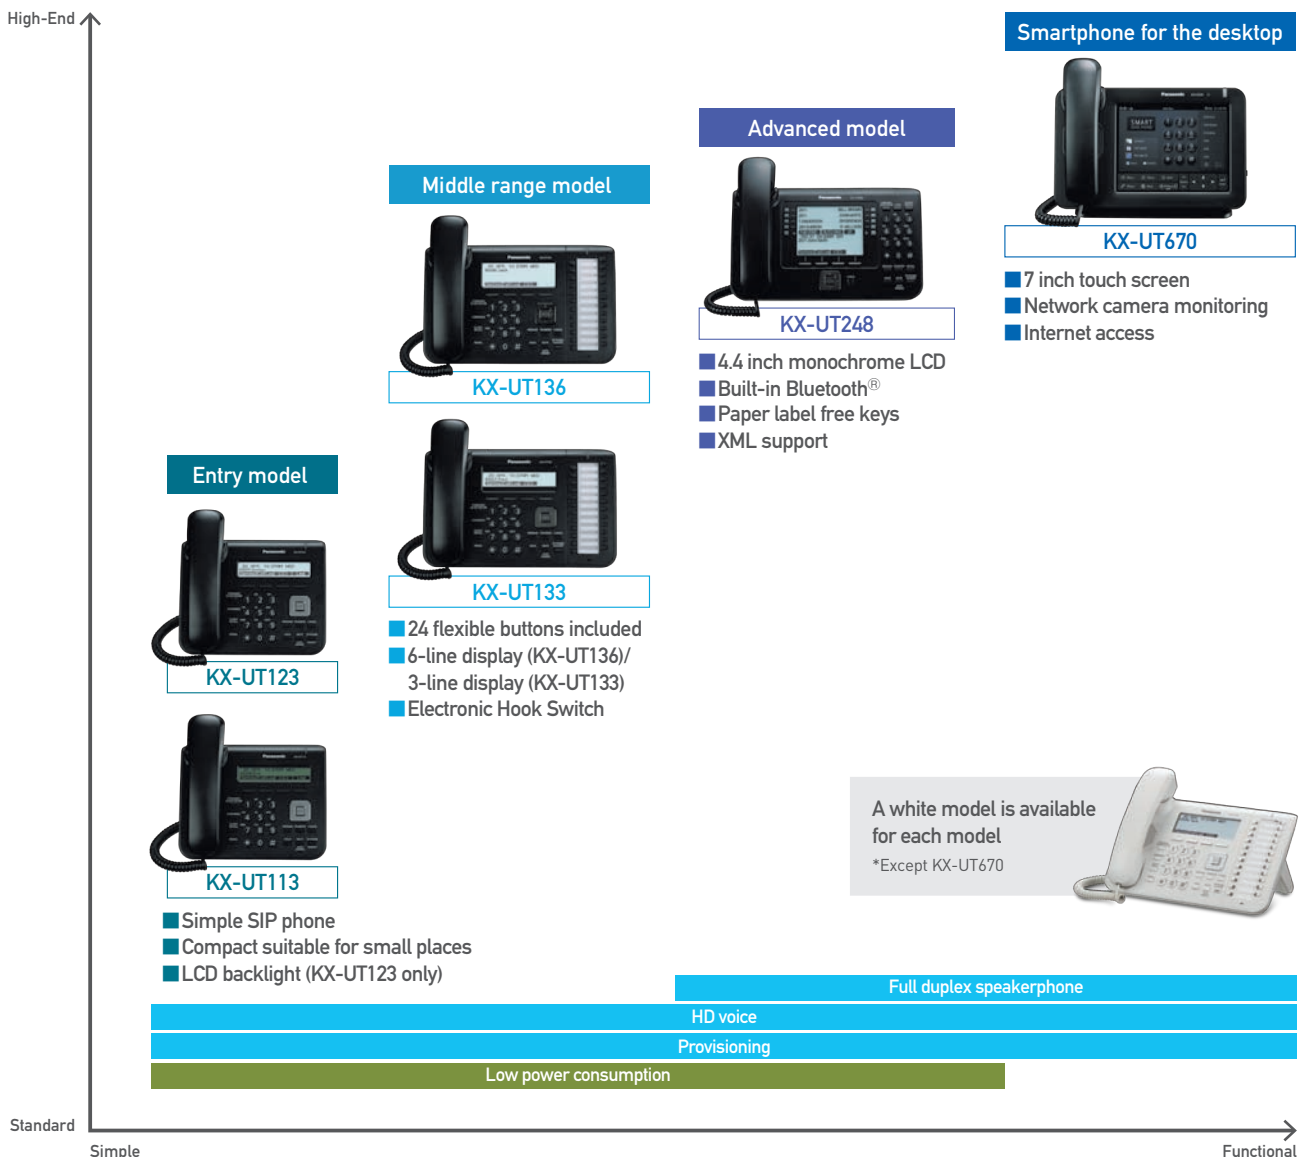


KX-UT Series Common Features

High voice quality, easy initial setup, and reduced power consumption
Panasonic's SIP phones have received improvement upon improvement to meet various customer needs.

Voice

Conventional phones have a narrow band voice, which is unable to adequately output low and high-pitched sounds. Since the KX-UT series supports the G.722 codec, it can cover a wide range including both low frequency and high frequency bands, enabling more comfortable conversations with a higher audio quality than conventional phones.

Receiving Frequency Response

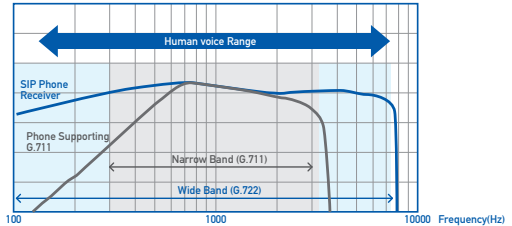

In contrast to narrow band (G.711) that can only cover part of the human voice range, wide band (G.722) covers a wider range of the human voice.

Speaker enhanced characteristics of low frequency and high performance



Speaker box

The KX-UT series utilises a speaker box to provide excellent audio quality when the speakerphone. The KX-UT series incorporates a speaker box in each model to improve audio quality at low frequencies (approx. 300 Hz), reduce echoing, and reduce sound distortion due to the speaker. The utilisation of a unique speaker cone and a magnet more powerful than its predecessors also achieves improved audio frequency band sensitivity.



Unique speaker cone



Stronger magnet

Full duplex speakerphone (KX-UT670/KX-UT248)

The speakerphone of the KX-UT670/KX-UT248 supports "full duplex," enabling both parties to speak at the same time without their voice getting cut out. This enables everyone to have smooth conversations using the speakerphone.

Interface

KX-UT670



KX-UT670

7 inch, WVGA colour touch screen

- High visibility with a large 800x480 pixel display
- 262,000 colours for vibrant images and video
- Touch panel enabling switching between screens and applications

Convenient LED lights

When you have a call, LED lights on both the front and back side of the phone enable you to notice with a single glance.



Back side

Changeable 30 / 65 degree stand

The angle of the display can be changed according to your needs. Can be tilted at either 30 degrees or 65 degrees.



KX-UT248/KX-UT136/KX-UT133/KX-UT123/KX-UT113



KX-UT248

4.4 inch display (KX-UT248)

A large LCD display enables ten lines of text to be easily viewed.

White backlight LCD

(KX-UT248/ KX-UT136/ KX-UT133/ KX-UT123)

A backlight makes the LCD display highly visible.



Backlight on



Backlight off

Easy to see label sheet

(KX-UT136/KX-UT133)

A label sheet with a wide area that enables the names of flexible buttons, etc. to be easily read.



← 23.5mm →

Easy to press ergonomic buttons

We have conducted user tests to develop a button shape that is easy to press, with a concave centre that suits human fingers.



Changeable 30 / 45 degree stand

(KX-UT248/KX-UT136/KX-UT133)

The angle of the display can be changed according to your needs. Can be tilted at either 30 degrees or 45 degrees.



Easy Configuration


Provisioning

Provisioning provides a system for specifying the initial settings before using a phone without fuss. This enables phones to be set up without travelling to customers in remote locations. It is also efficient because the settings for many devices can be specified quickly.

Easy Initial Settings*

The user has only to connect the SIP phone to the LAN cable to complete the initial settings. When the SIP phone is connected to the network for the first time, the SIP phone automatically retrieves the provisioning server address from the Panasonic redirection server to start provisioning.

*The combination of the terminal MAC address and provisioning URL must be set in the redirection server in advance.

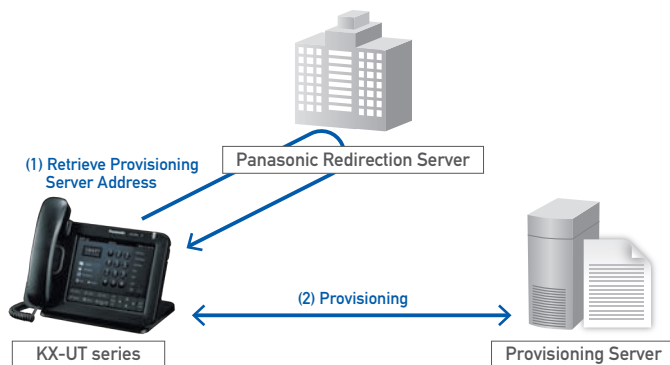


Broadsoft DMS Supported

Broadsoft DMS (Broadsoft Device Management System) is supported.



Secure Provisioning Route

Settings files can be encrypted and sent from a server so that they cannot be easily viewed. You can also use https as the communication protocol to increase the security of data.

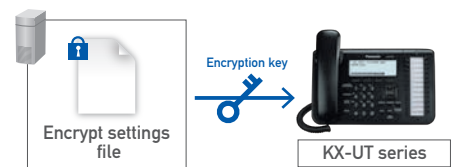

*Protocols that can be used with provisioning: HTTP, HTTPS, FTP, TFTP.

ECO


Low Power Consumption

Supported models: KX-UT248/KX-UT136/KX-UT133/KX-UT123/KX-UT113


The KX-UT Series saves energy even during standby mode and while calling. By using ECO mode, power consumption can be reduced even further. This enables you to reduce power consumption compared to equivalent products from other companies to assist energy saving at your office.

SIP Phone Power Consumption Comparison

■ KX-UT136/KX-UT123 and equivalent products from other companies

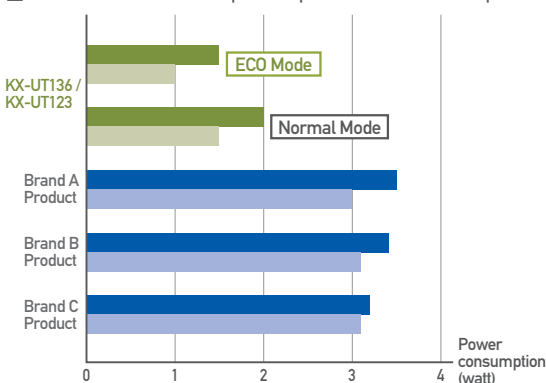

■ KX-UT248 and equivalent products from other companies

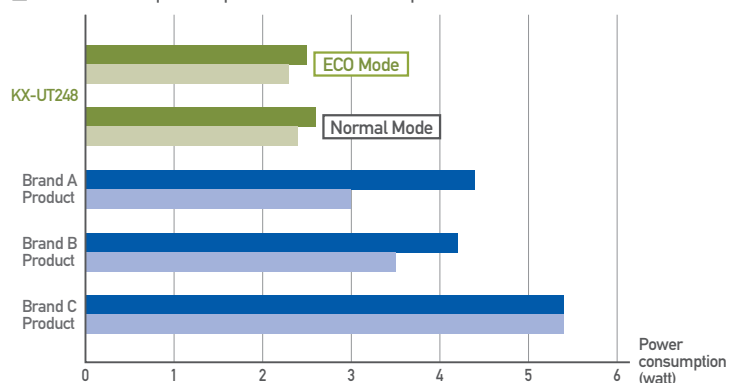

*Source: Panasonic survey in March, 2012.

* Input voltage when using an AC adaptor: 220V/50Hz or 120V/60Hz, connection only with the LAN port, value when using 100BASE-T. (However, only 10BASE-T is active when using UT ECO mode.) For the KX-UT248, KX-UT136 and KX-UT123, the conditions for measuring the power consumption differ from those of the specifications on the back cover.

* When using ECO mode, the PC port cannot be used. Also, the LAN port will be 10 Mbps.

Customisation

XML support

Supported models: KX-UT248/
KX-UT136/KX-UT133/KX-UT123/KX-UT113

XML applications can be used to customise or control the phones. For example, you can customise the menu screen to assign soft keys, or access the address book of an LDAP server.



KX-UT670



This phone combines a large easy to view display with the intuitive operability of a touch panel. The phone can also use a network camera viewer, and various applications can be developed according to user needs. In other words, this phone can be used in a wide range of situations to suit your specific needs.

KX-UT670 Features

7 inch, colour LCD touch screen

The phone includes a large 7 inch WVGA screen (800 x 480) with a high precision 262,000 colour LCD, for a clear, crisp Web viewing experience.



Web browser

Touch panel enabling intuitive operations

The LCD screen can be used as a touch panel, enabling you to easily perform operations such as entering characters. Touch operations and swipe operations provide a user friendly experience like that of a smartphone. Not only dialling, but other operations such as viewing mail and checking schedules in a calendar can be conducted smoothly.



Phone



During a call



Calendar

● The KX-UT670 comes preinstalled with various applications such as a calendar and a Web browser. The calendar can be linked with a smartphone to synchronize your schedule.*
*Schedule synchronization using the Google Calendar™ service is available. This requires a Google™ account.

Headset support

A headset jack is included for long calls. by connecting an EHS (Electronic Hook Switch) headset to the EHS jack, you can perform wireless communication.*

*Headset and EHS headset not included.



Network camera viewer

The phone can be used as a network camera viewer if used in conjunction with a Panasonic network camera.*1 For example, it can be used as a reception terminal for suitably and smoothly handling visitors while viewing them on the screen. The network camera can also be remotely operated*2 to change its angle to view what you want, and camera sensor detection can be used to automatically display the camera's video on the screen.



As a door phone for visitors

To check the status of remote offices and factories

- The network camera viewer function can be used by connecting a network camera.
- Network camera settings cannot be changed.
- There is a limit to the number of devices (KX-UT670, computers, etc.) that can view the video of a network camera at the same time. When this number is exceeded, a device may not be able to display the video of the network camera.
- If the resolution of the video output by the network camera exceeds the performance of the KX-UT670 (800 x 480 pixels), the video will not be displayed. (Example: 1280 x 960 pixel video cannot be displayed.)

*1 The following camera models can be connected (as of May 8th, 2012): WV-SW396/395/316L/316/314/175/172/155/152, WV-ST165/162, WV-SP306/305/302/105/102, WV-SF346/342/336/335/332/135/132, WV-SC386/385/384, WV-NW502S, WV-NP502, BL-VT164/164W, BL-VP104/104W (Panasonic).

*2 Available camera operations differ according to the camera connected.

Application development

A program development environment is provided, allowing you to develop various applications.

- Dedicated development software (APIs and libraries) for the smart desk phone is separately provided for software developers. For details, see the following website:
http://panasonic.net/pcc/products/sipphone/products/kx_ut670/application.html
- An SIP phone system interface and network camera system interface are included.
- Java is supported.
- Provided with APIs, class libraries, and wrappers.

Example Third Party Applications

Applications can be developed for use by a variety of businesses.

Hotel Phone



Orders can be placed directly from the on-screen menu.

Food Delivery Services




The screen can be used to search for information about the area around the hotel.

Office Facility Control



The screen can be used to open or close curtains, and to turn the air conditioner on or off.


Monitoring



The network camera image can be viewed on-screen, and operating buttons can be changed as necessary.

Software Architecture for the KX-UT670

The KX-UT670 is based on open-source software. KX-UT670 applications are developed in the same manner as those for other devices.

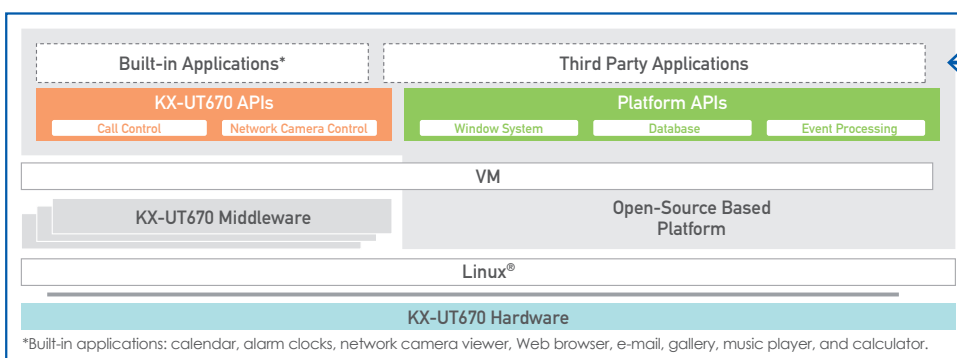

*Built-in applications: calendar, alarm clocks, network camera viewer, Web browser, e-mail, gallery, music player, and calculator.


KX-UT248



KX-UT248 Features

4.4 inch monochrome LCD

Includes a 10-line backlit LCD. The large screen with easy to read text enables you to check the presence status of someone at a glance.



Full duplex speakerphone

Enables you and the other party to hear each other's voice clearly, even if you speak at the same time.

Paper label free (self-labelling)

8 flexible function keys can be constantly displayed, and up to 24 numbers can be registered. Since the numbers are displayed on the screen, a paper label is not required.

Built-in Bluetooth for headsets

Includes Bluetooth for wireless calls using a supported headset.

XML customisation support

The information displayed on the LCD screen can be customised. Enables the devices to be used as an information terminal in addition to a telephone.

- Retrieve connection authentication with Asterisk and Broadsoft
- HD voice (headset and speakerphone)
- Low power consumption
- Supports XML customisation
- PoE (Power over Ethernet)
- 24 function keys* * Requires setting at least 2 flexible buttons as a DN button for calling or receiving the phone.

KX-UT136/KX-UT133




Photo: KX-UT136

KX-UT136 / KX-UT133 Features

24 function keys*

Includes 24 flexible function keys for registering numbers. The one-touch presence function enables you to tell if someone is at their desk at a glance.

* Requires setting at least 2 flexible buttons as a DN button for calling or receiving the phone.



Easy operation

Includes a large LCD for high visibility. Easy operations with a user friendly button layout.

Electronic Hook Switch

Wireless communication is possible by connecting an Electronic Hook Switch (EHS) headset to the EHS jack on the side of the main unit.*

* An EHS headset is not included.

- Retrieve connection authentication with Asterisk and Broadsoft
- HD voice (handset and speakerphone)
- Low power consumption
- Supports XML customisation
- PoE (Power over Ethernet)

Difference between KX-UT136 and KX-UT133

Items	KX-UT136	KX-UT133
LCD	 6-Line LCD	 3-Line LCD

KX-UT123 / KX-UT113



Photo: KX-UT123

Retrieve connection authentication with Asterisk and Broadsoft

Supports Asterisk and Broadsoft for connecting to a wide range of devices. The devices to connect to can be selected to meet customer needs.

HD voice (handset and speakerphone)

Supports the G.722 codec. Enables calls with a HD voice quality that makes it seem like you are face-to-face with the other party.

Low power consumption*

Since the device automatically switches to the power saving mode when not in use, no manual operation is required. This contributes to reduced power consumption.

* The ECO mode can be switched on and off.

XML customisation support

The information displayed on the LCD screen can be customised. Enables the devices to be used as an information terminal in addition to a telephone.

PoE (Power over Ethernet)

Supports PoE. If you have a power supply hub, no AC adapter is required.

Difference between KX-UT123 and KX-UT113

Items	KX-UT123	KX-UT113
Backlit LCD	Yes	No
Phone book	500	100
Ethernet port	2	1

Business Solutions

Panasonic's KX-UT series phones can be combined with servers and peripherals to be utilized in various industries.

Offices

The clear sound and user-friendly interface of the phones enable you to conduct daily telephone work smoothly. When you are away from a phone, it can be set to the ECO mode to reduce unnecessary power consumption.



Contact Centres

For work that involves long calls, such as customer support and help desks, the phone can be used in combination with a headset.




Government Offices

With application development and XML customisation, the phones can also be used as dedicated work terminals.



Visitor Reception

The KX-UT670 can be linked with a network camera to enable you check the status of visitors from your desk. An application can also be developed to enable the phone to be used as a visitor terminal for calling employees.

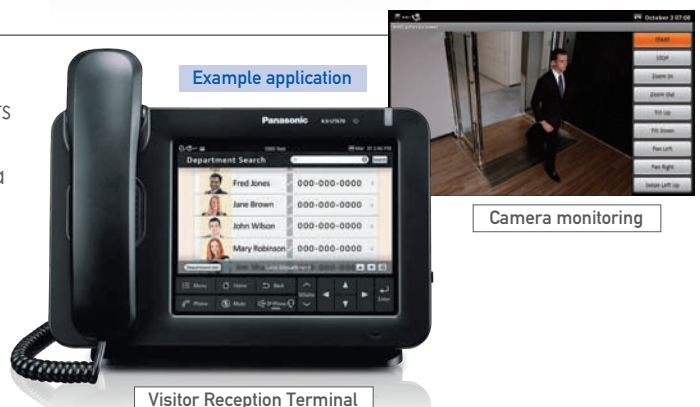

	KX-UT670	KX-UT248	KX-UT136	KX-UT133	KX-UT123	KX-UT113	
Display							
LCD Display	Colour 262000	4-level grayscale graphical	Monochrome Graphical				
LCD Size	7 inch touch display	4.4 inch	242 x 109 pixels-6 lines	242 x 55 pixels – 3 lines			
LCD Contrast	N/A		6 levels				
LCD Backlight	18 levels/Auto	On/Auto/Off				N/A	
HD Video	720p	N/A					
Install Options							
Desk Mount Tilt	Yes – 2 positions				N/A		
Wall Mount	KX-A434 (optional)	KX-A433 (optional)			KX-A432 (optional)		
Power Adaptor	KX-A422 (optional)	KX-A239 (optional)					
Audio Features							
Handset, Speaker, Headset Volume	15 levels	8 levels (includes echo cancellation and distortion prevention)					
Ringtones	32						
Ringer Volume	7 levels + Off	6 levels + Off					
Audio Codec	G.711a-law / G.711μ-law / G.722 (wideband) / G.729a	G.711a-law / G.711μ-law / G.722 (wideband) / G.729a / G.726 (32K)					
HD Voice	Yes						
Speaker Phone	Yes (Full Duplex)			Yes			
Keys							
Flexible Keys	24* (4 pages of 6 keys)	24* (3 pages of 8 keys)	24*		N/A		
Software Features							
Phone Book (Entries)	Depends on memory	500			100		
Call Log Entries	100 in + 100 out	30 incoming calls + 30 outgoing calls					
Conferencing	3 parties (within terminal – multi-party dependent on server)						
XML support	No	Yes					
Music on Hold	Supplied by Host Service (PBX / SIP Server)						
Memory	50 MB	N/A					
IP Features							
SIP Accounts	6		4		2		
SIP Compatibility	RFC 3261 Standard SIP Server, Asterisk, Broadsoft, Panasonic SIP PBX						
IP Version	IPv4						
DHCP Client	Yes						
DNS	Yes						
HTTP	Yes						
HTTPS	Yes						
SNTP Client	Yes						
VLAN (802.1q)	Yes						
QoS (DiffServ)	Yes						
Configuration							
Plug & Play Configuration	Server based configuration, TR-069, Panasonic Redirect Server						
Manual Configuration	Internal web configurator, Local (LCD based) network configuration						
Headset Interface							
Headset Port	2.5 mm						
Electronic Hook Switch Control Port	3.5 mm				N/A		
Bluetooth	No	Yes	No				
Network Interface							
Ethernet Ports	2			1			
Ethernet Interface	10/100/1000 Mbps			10/100 Mbps			
PoE (Power over Ethernet)	IEEE 802.3af Class 3 standard compliant			IEEE 802.3af Class 2 standard compliant			
Others							
Power Consumption	PoE Standby: 5.2 W (Backlight OFF) Talking: 7.0 W Max: 12.9 W AC Adaptor Standby: 4.6 W (Backlight OFF) Talking: 6.2 W Max: 11.5 W	PoE Stand-by: 3.5 W (ECO mode off), 2.3 W (ECO mode on) Talking: 4.1 W (ECO mode off), 2.5 W (ECO mode on) Max: 7.5 W AC Adaptor Stand-by: 4.0 W (ECO mode off), 2.2 W (ECO mode on) Talking: 4.5 W (ECO mode off), 2.7 W (ECO mode on) Max: 7.5 W	PoE Standby: 1.8 W (ECO mode off), 1.3 W (ECO mode on) Talking: 2 W (ECO mode off), 1.5 W (ECO mode on) Max: 6 W AC Adaptor Standby: 1.6 W (ECO mode off), 1 W (ECO mode on) Talking: 2 W (ECO mode off), 1.5 W (ECO mode on) Max: 6 W				
Operating Environment	0 °C - 40 °C (32 °F - 104 °F)						
Dimensions (Width x Depth x Height; handset on cradle, stand attached)	High position: 270 mm x 180 mm x 220 mm Low position: 270 mm x 192 mm x 170 mm	High position: 267 mm x 170 mm x 180 mm Low position: 267 mm x 187 mm x 155 mm			205 mm x 160 mm x 170 mm		
Weight (with handset, handset cord and stand)	1300 g	1130 g	1120 g	1120 g	870 g	860 g	

* Requires setting at least 2 flexible buttons as a DN button for calling or receiving the phone.

Trademarks and registered trademarks

– The Bluetooth word mark is owned by the Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation is under license. Google and Google Calendar are trademarks or registered trademarks of Google Inc. Other trademarks and trade names are those of their respective owners.

Important

– Safety Precaution: carefully read the operating instructions and installation manual before using this product.

- The images shown of products' displays and lights are composite images.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY :



800.873.5528
WWW.TARGETD.COM



<http://panasonic.net/pcc/products/sipphone>