
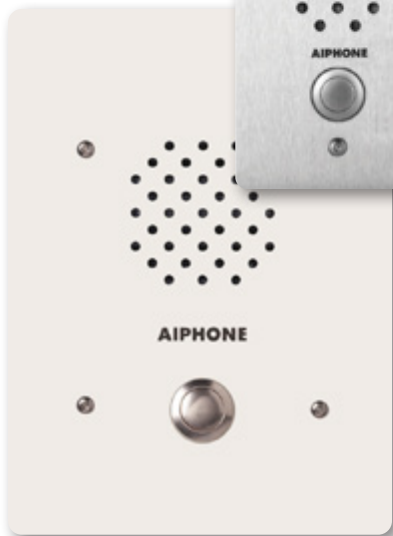


LEM-1DL Series

Communication and
Entry Security System



Homes | Offices | Schools | Industrial Facilities

Components - Mix and match up to 1 door station and 4 master stations

Door Stations - Select 1



LE-D
Audio Door Station

- Plastic chassis
- Surface mount
- Fits 1-gang box 4-3/4"H
- 3-7/16"W
- 1-1/8"D



LE-SS-1G
Audio Door Station

- Stainless steel panel
- Flush mount
- Fits 1-gang box 4-1/2"H
- 2-3/4"W
- 2-1/2"D (back box depth)



LE-DA
Audio Door Station

- Stainless steel cover
- Flush mount
- Fits 2-gang box 4-1/2"H
- 4-9/16"W
- 2-1/2"D (back box depth)



LE-SS/A
Audio Door Station

- Stainless steel panel
- Flush mount
- Fits 2-gang box 4-3/4"H
- 2-1/2"D (back box depth)



LE-SSR
Audio Door Station

- Red mushroom call button
- Stainless steel panel
- Flush mount
- Fits 2-gang box 4-3/4"H
- 4-3/4"W
- 2-1/2"D (back box depth)



DISCONTINUED

LE-SSV
Audio Door Station

- Built-in CCTV camera
- Stainless steel panel
- Flush mount
- Fits 2-gang box 4-3/4"H
- 4-3/4"W
- 2-1/2"D (back box depth)



LS-NVP/C
Audio Door Station

- Powder-coated steel panel
- Flush mount
- Fits 3-gang box 7-1/2"H
- 5-1/2"W
- 2-1/2"D (back box depth)

NOTE: Aiphone recommends a 2-1/2" minimum back box depth for all flush mount door stations.

Master Stations - Select up to 4



LEM-1DL
Audio Master Station
(requires 1 DAK-2S per every 2 master stations in the system)

- Door release button
- Surface mount
- 7-1/16"H
- 5-5/8"W
- 2-1/8"D



LEM-1DLC
Audio Master Station

- Multi-master (max. 4)
- Door release button
- Occupied LED
- Surface mount
- 7-1/16"H
- 5-5/8"W
- 2-1/8"D

Starter Kit - Includes door station, master station, and transformer *(up to 3 additional master stations can be installed for door answering)*

Start small,
expand later!



LEM-1DLS

Box Set Starter Kit Includes:

- 1 LEM-1DL Master Station
- 1 LE-D Door Station
- 1 PT-1210N Transformer

Power Supply



PT-1210N
12V AC
Transformer
(required for system - 1 per master station)

Accessories




HID-SS
Card Access Station with
HID® ProxPoint® Plus
Proximity Card Reader
(requires a 3rd party host)



KMB-45
45° Mullion
Mounting
Bracket for LE-D



SBX-1G
Surface Mount
Box for LE-SS-1G



SBX-2G
Surface Mount
Box for LE-DA,
LE-SS/A, or
LE-SSR



DISCONTINUED
SBX-2BH
Horizontal Surface
Mount Box for HID-SS
and one LE-DA,
LE-SS/A, or LE-SSR




SBX-NVP
Surface
Mount Box
for LS-NVP/C



BBX-1E
Flush Mount
Back Box
for LE-B
or LE-BN

Specifications

Spec▼	Model▶	LEM-1DL, LEM-1DLC
Power Source		12~16V AC - use PT-1210N, 12~24V DC, 200mA
Output		100mW
Wire Type		Door Station to Master Station: 2 cond., overall shield (Aiphone wire #822202 or #821802) Between LEM-1DLCs: 3 cond., overall shield (Aiphone wire #822203 or #821803)
Wire Distance		Door Station to farthest Master Station: 650' (22AWG) 1,600' (18AWG)



DAK-2S
Dual Master
Adaptor Kit



RY-18L
Form C Door
Release Relay



EL-12S
Electric
Door Strike
(requires PT-1210N)

LEM-1DL Series Brochure

08/2016

Digital Copy

The information in this brochure is subject to change without notice.



GS-35F-0065L



Aiphone Co. Ltd.



Aiphone Corp.



Aiphone Co. Ltd.