

# SIP Hand Wave Indoor Intercom

# CyberData

The IP Endpoint Company

The SIP Hand Wave Indoor Intercom is a **gesture-activated** device delivering **touch-free** two-way communication and secure access control for your VoIP phone system.

**Activated by a hand wave**, this device is ideal for high-traffic settings such as medical facilities, commercial/residential facilities, schools and universities, retail establishments, warehouses, and manufacturing plants.

CyberData's SIP-enabled VoIP products are compatible with a vast majority of VoIP systems including SBCs, Gateways, and phone systems both on-premise or cloud-based.

## Features

- Full duplex audio with enhanced acoustic echo cancelling
- Simultaneous SIP and multicast
- Supports user-uploadable ring and alert tones
- Loud/Night Ringer function - second SIP extension
- Can receive pages directly from Poly phones as well as other devices that send standard multicast
- **Touchless activation** reduces spread of infectious diseases
- DTMF-controlled dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Network volume control
- Supports Auxiliary Strobe Kit for visual notification
- Easy-to-clean stainless steel faceplate
- Flush mounting offers a clean streamlined installation
- TLS 1.2 enhanced security for IP endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS or HTTP web based configuration. HTTPS is enabled by default.
- Configurable event generation for device health and status monitoring
- 802.11q VLAN tagging
- Web-based upgradeable firmware
- Support for Cisco SRST resiliency





## Specifications


Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Speaker Output	2 Watts Peak Power
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711μ-law, G.722, and G.729
Network Security	TLS 1.2
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	Temperature: -40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	5.827 inches [148 mm] Length 2.319 inches [59 mm] Width 7.205 inches [183 mm] Height
Weight	1.0 lbs. [0.45 kg]
Boxed Weight	2.2 lbs. [1.0 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive EN 62368-1; RoHS Compliant; FCC Part 15 Class A; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	2 Years Limited
Part Number	011530

\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

# SIP Hand Wave Indoor Intercom

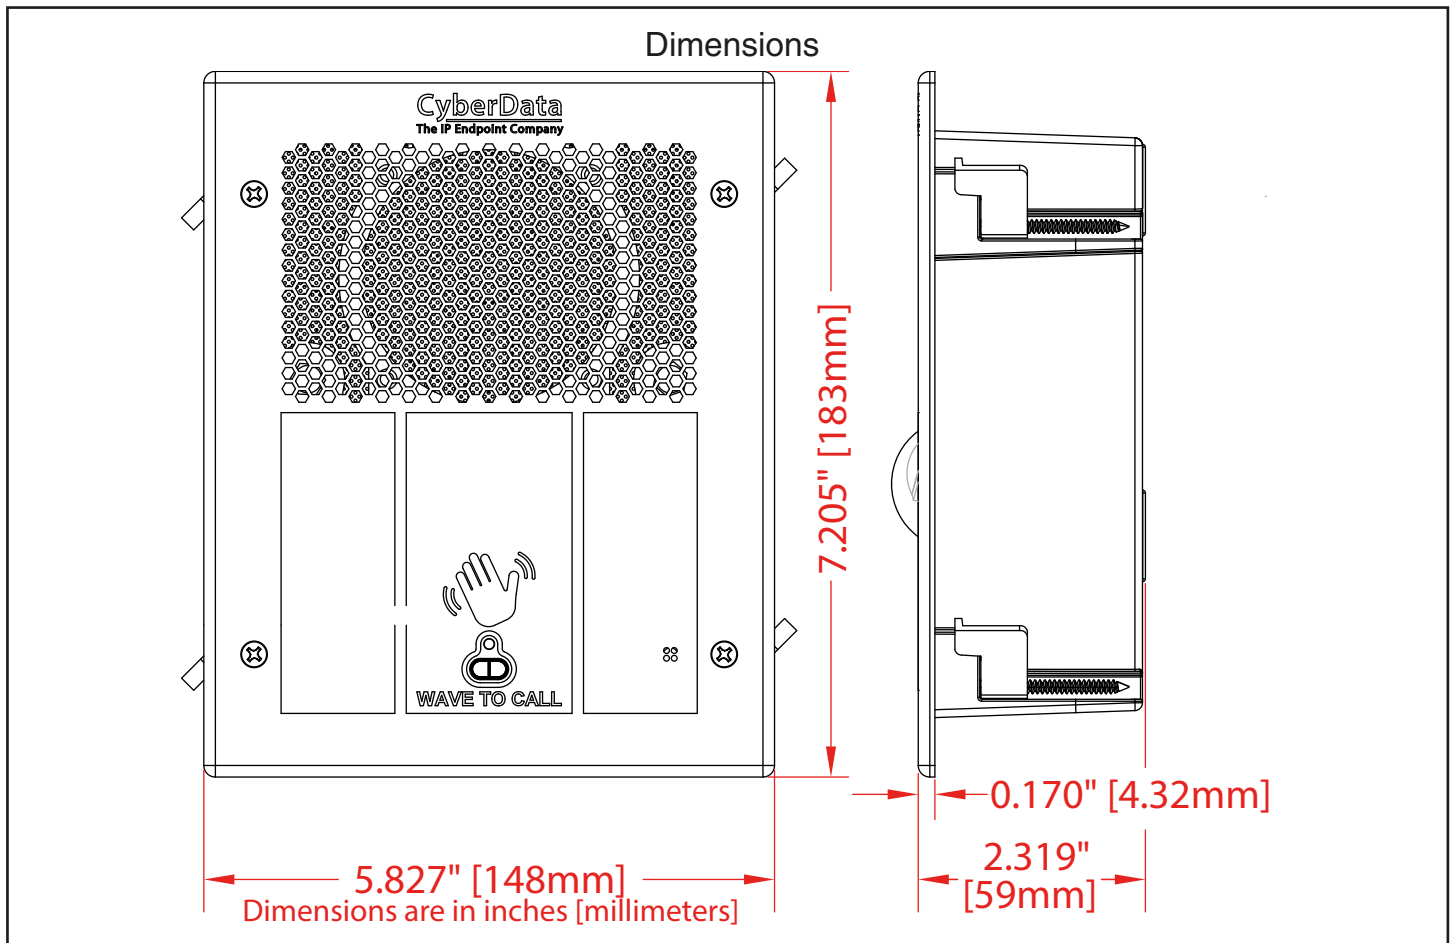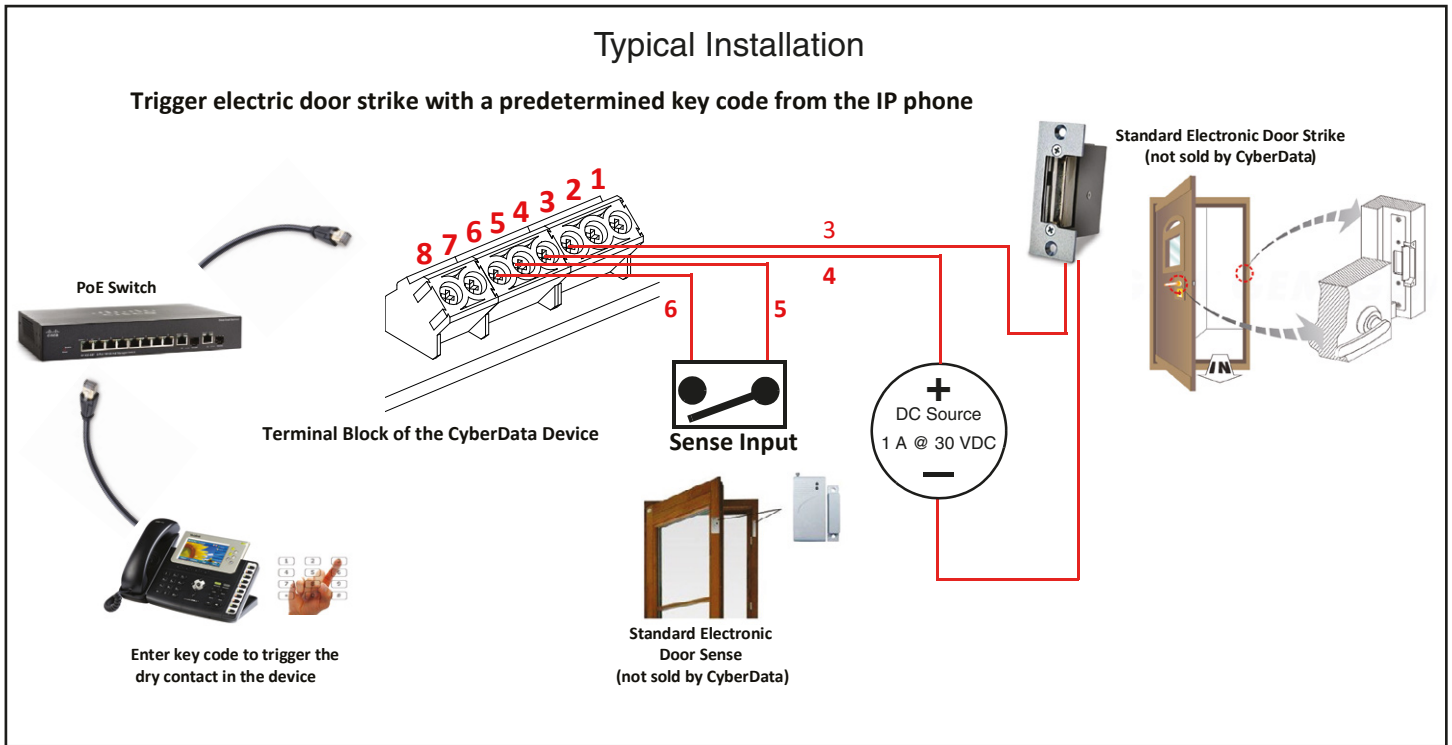

# SIP Hand Wave Indoor Intercom

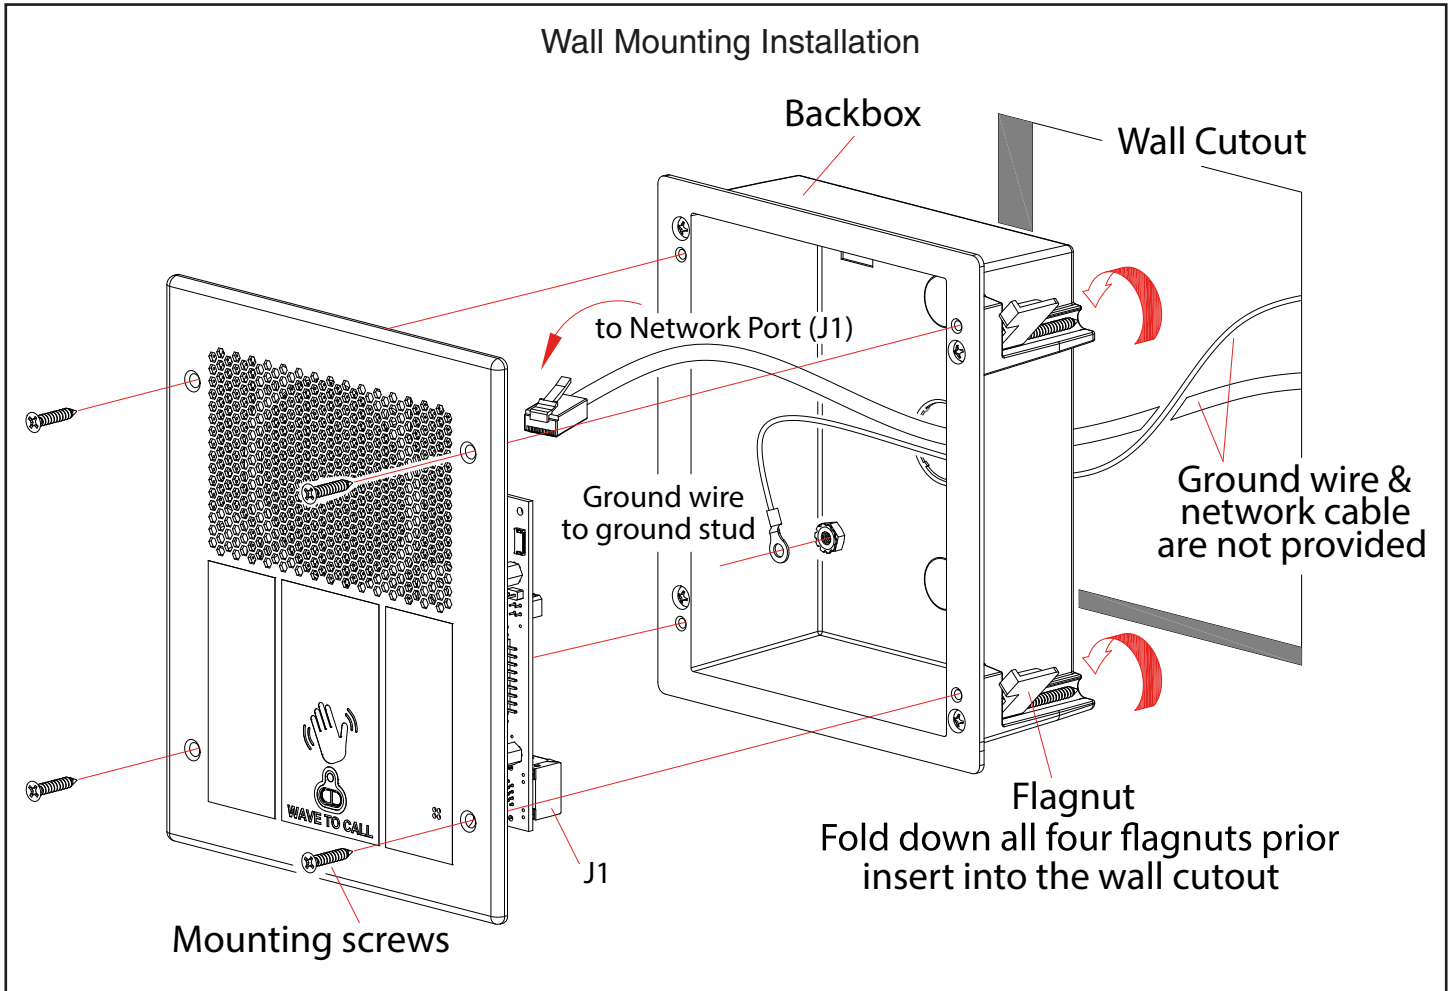

## Related Products:



011375 Network Dual Door Strike Relay



011269 Door Strike Intermediate Relay Module



011288 Auxiliary RGB (Multi-Color) Strobe Kit



011490 Outdoor Auxiliary RGB (Multi-Color) Strobe Kit